






MATING PLUG



SCHEMATIC

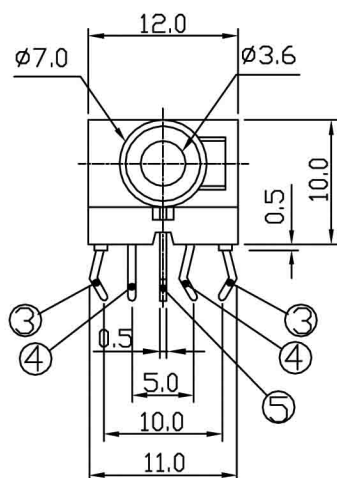

P.C.B LAYOUT

5	TERMINAL	BRASS	1	Ag PLATED		4	TERMINAL	BRASS	2	Ag PLATED
3	CONTACT	PBS-SH	2	Ag PLATED		2	FRAME	P B T	1	
1	FRAME	P B T	1			NO	PART	MATERIAL	QTY	REMARKS
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS	
ISSUED		SPECIFICATION				TITLE: 3.5mm STEREO JACK				
		RATING: DC 30V 0.3A				MODEL NO: SCJ-0349A				
		CONTACT RESISTANCE: 50mΩ MAX				UNIT: MM DWN 白竟成				
		INSULATION RESISTANCE: 100MΩ AT 500V DC				SCALE: 1.5:1 CHK'D 汪志勇				
		WITHSTAND VOLTAGE: AC 500V for 1 minute				TOLERANCE: ±0.2 APPD. 万运和				
		OPERATION FORCE: REFER ATTACH SPECIFICATION								
		SWITCHING LIFE: 5k cycles min								
BY: 万运和									DRWG NO:	
DATE: 10-APR-2006									VERSION: 1.0	