
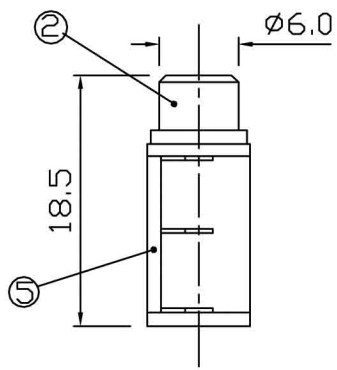

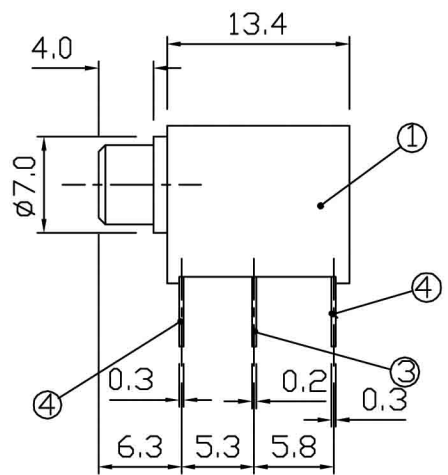
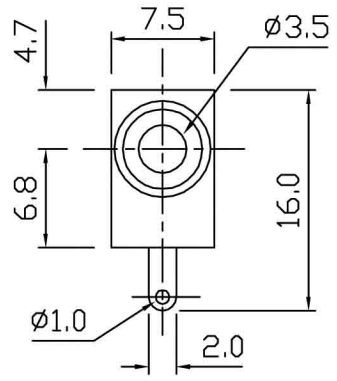


RoHS
Compliance



5	COVER	P C	1		6	SPRING	STEEL	1	
3	CONTACT	S U S	1	Ag PLATED	4	TERMINAL	BRASS	2	Ag PLATED
1	FRAME	P C	1		2	SHEATH	COPPER ALLOY	1	Ni PLATED
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS
ISSUED		SPECIFICATION				TITLE: MONO TYPE EARPHONE JACK			
		RATING: DC 30V 0.3A				MODEL NO: SCJ-0352-1			
		CONTACT RESISTANCE: 50mΩ MAX				UNIT: MM DWN 白竟成			
		INSULATION RESISTANCE: 100MΩ AT 500V DC				SCALE: 2:1 CHK'D 汪志勇			
		WITHSTAND VOLTAGE: AC 500V for 1 minute				TOLERANCE: ±0.2 APPD. 万运和			
		OPERATION FORCE: REFER ATTACH SPECIFICATION							
		SWITCHING LIFE: 5k cycles min							
BY: 万运和								DRWG NO:	
DATE: 27-OCT-2006								VERSION: 2.0	