


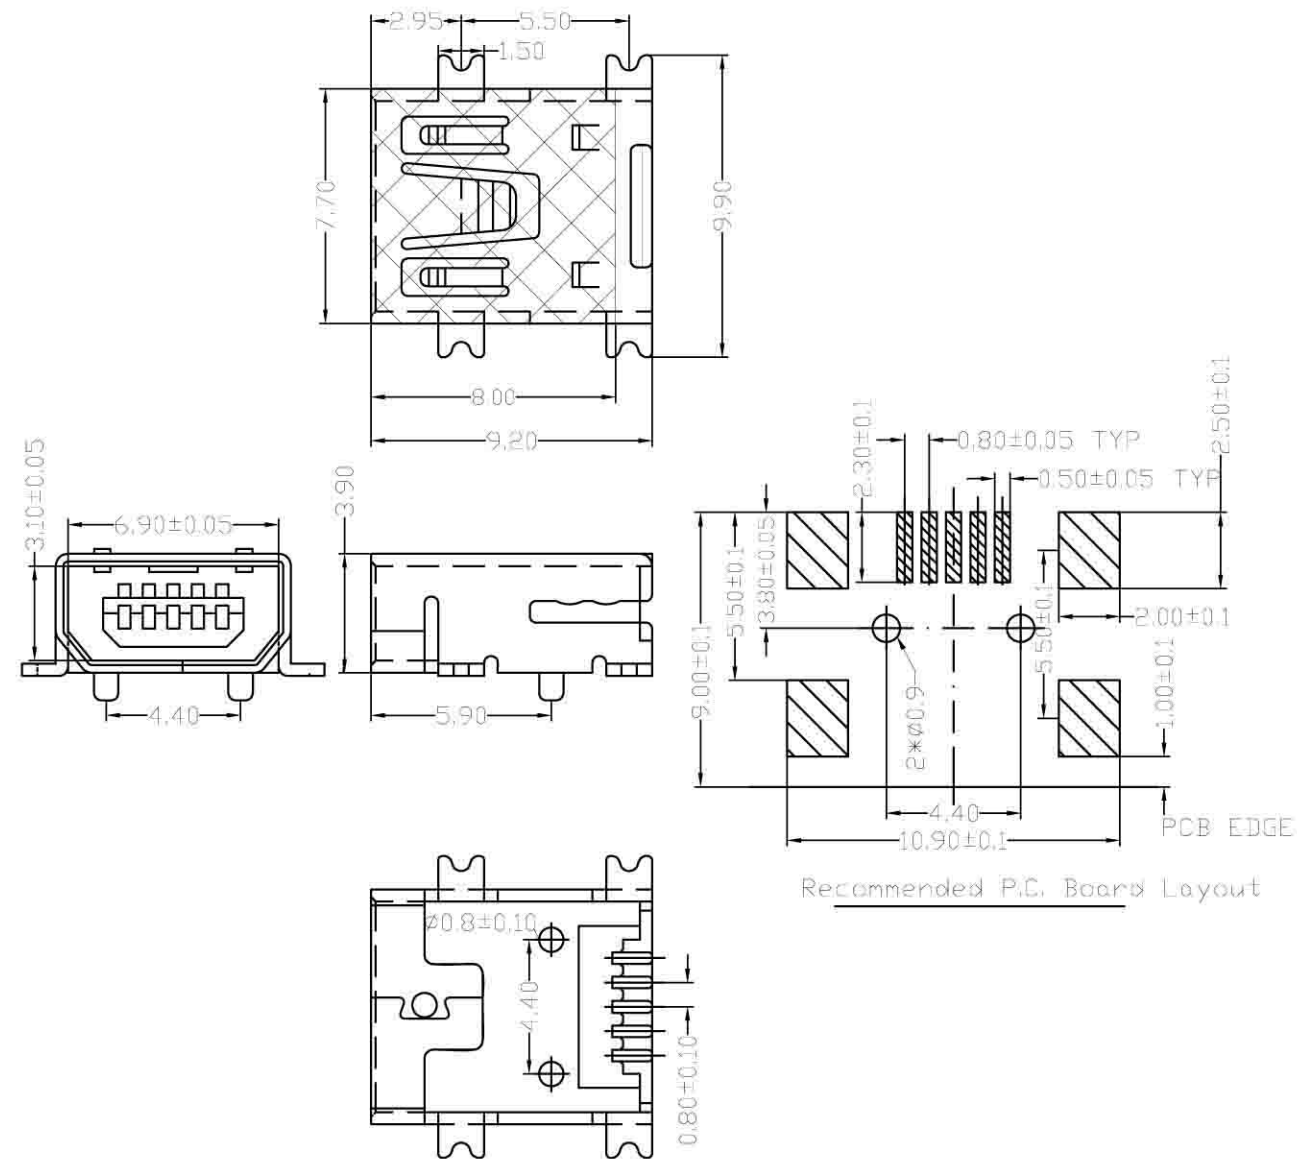

NOTES:

Electrical Specifications:

Contact Resistance: 50minliohms MAX

Dielectric Withstanding: Voltage 100VAC AT SeaLevel

Insulation Resistance: 100MΩ MIN

Material:

Housing :Hing Temperature: UL94V-0

Contact:Copper Alloy

Shell:Copper Alloy

PLATING:

Contact:Piated Gold in

Mating Area;Tin On Solder Talls

Nickel/Plating

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±
.0	±0.25
.00	±0.20

SCALE: AS SHOWN UNIT: mm

DRAWN willis 2008/9/2

CHECKED / /

APPROVED / /

DATE SIZE A4 REV.



DRAWN NAME: MINI USB-AB Connector
5PIN,Female SMT Type

PRODUCT NO. USB-M-C-FBT0-R03

FILE NAME:

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	
2				
3				
4				
5				
6				
7				
8				
9				
10				