




Non-shorting


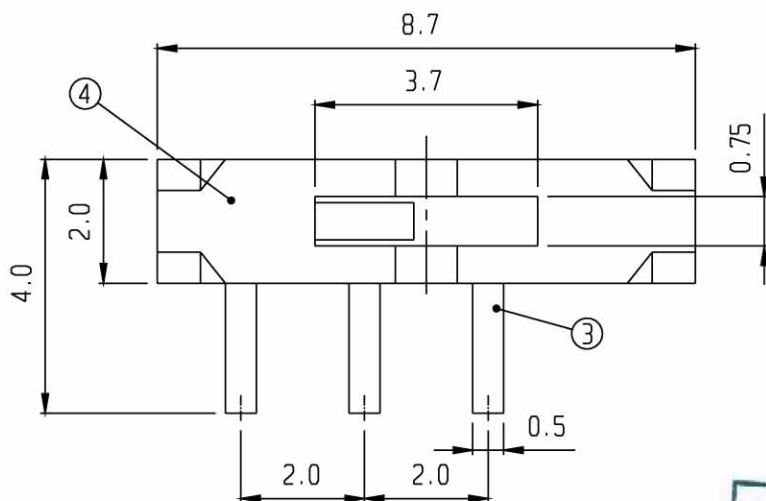


SCHEMATIC

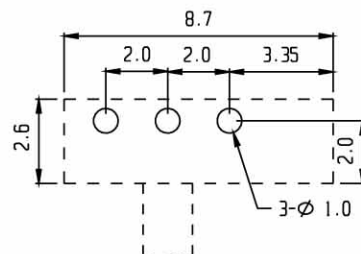

P.C.B.LAYOUT

RoHS
Compliance

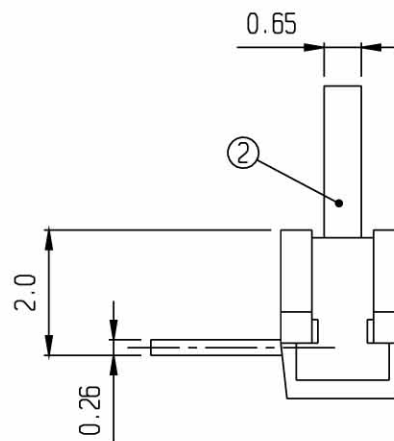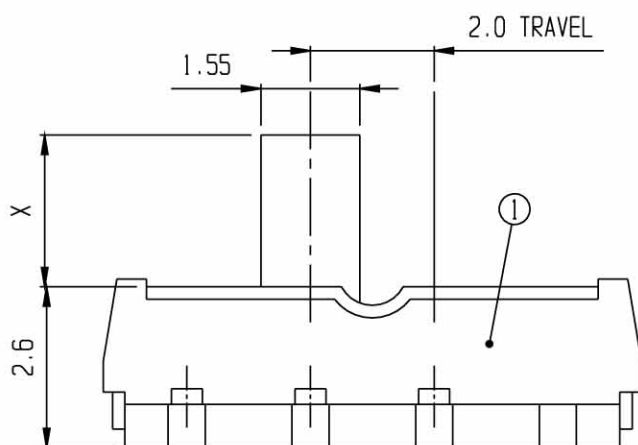

5	CONTACT	P B S	1	Ag PLATED					
3	TERMINAL	BRASS	3	Ag PLATED	4	COVER BOARD	S U S	1	
1	FRAME	NYLON 46	1		2	KNOB	NYLON 46	1	TA 2-5
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: MINIATURE
SIDE KNOB SLIDE SWITCH (1P2T)

RATING: DC 12V 0.1A
 CONTACT RESISTANCE: 70mΩ max.
 INSULATION RESISTANCE: 100MΩ AT 500V DC
 WITHSTAND VOLTAGE: AC 100V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 10K cycles min.

MODEL NO: MSK-12D18

TOLERANCE UNIT: MM
 UP TO 1.0:±0.1
 1.0 TO 10.0:±0.2
 OVER 10.0:±0.3
 SCALE: 8:1
 VERSION: 02
 DRWG NO:

DWN.
 CHK'D.
 APPD.

BY:
 DATE: 07-AUG-2007

VIMEX
 INTERNATIONAL CORPORATION

