
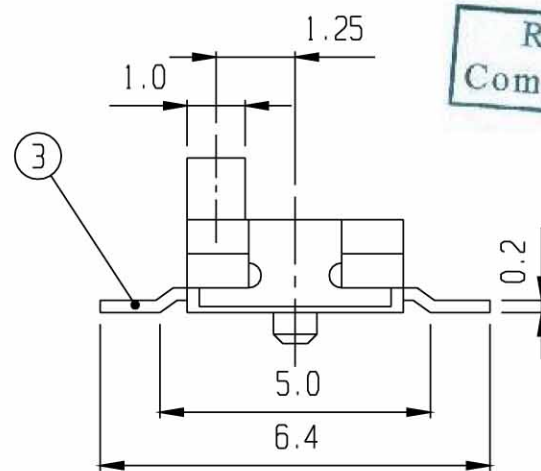
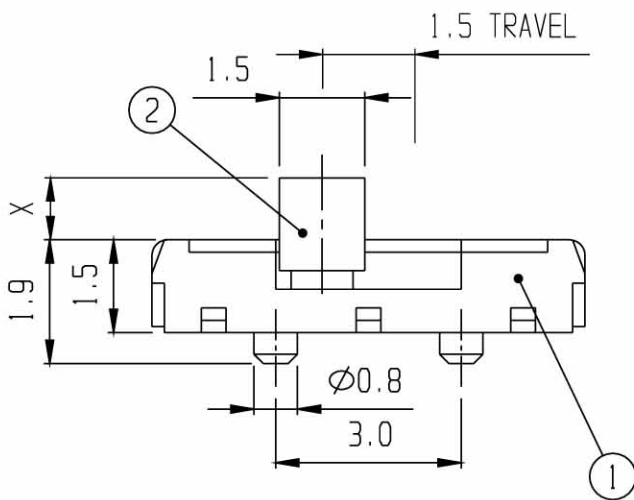
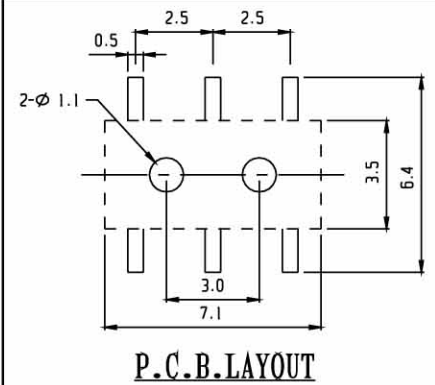
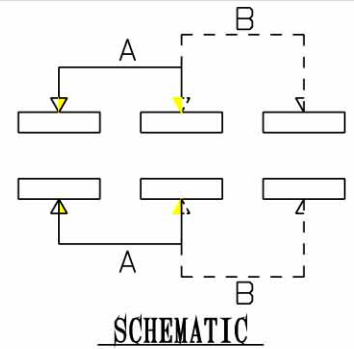


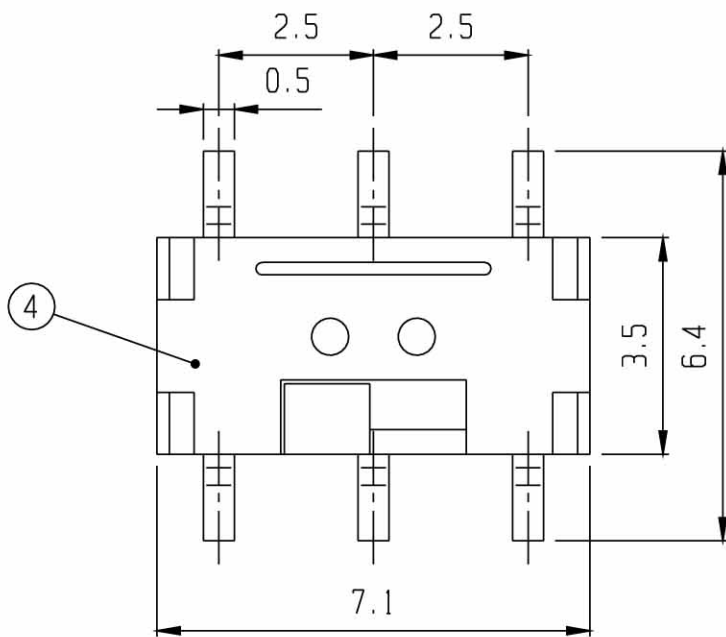

RoHS
Compliance

5	CONTACT	CuBe	2	Ag PLATED	6	SPRING PLATE	S U S	1	
3	TERMINAL	BRASS	6	Ag PLATED	4	COVER BOARD	S U S	1	
1	FRAME	NYLON 46	1		2	KNOB	NYLON 46	1	TG 1-3
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: MINIATURE SLIDE SWITCH (2P2T)

RATING: DC 12V 0.1A
 CONTACT RESISTANCE: 70mΩ max.
 INSULATION RESISTANCE: 100MΩ AT 500V DC
 WITHSTAND VOLTAGE: AC 100V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 10K cycles min.

MODEL NO: MSS-22C02

TOLERANCE UNIT: MM
 UP TO 1.0:±0.1
 1.0 TO 10.0:±0.2
 OVER 10.0:±0.3
 SCALE: 8:1
 VERSION: 04
 DRWG NO:

DWN.
 CHK'D.
 APPD.

BY:
 DATE: 24-AUG-2006

VIMEX
 INTERNATIONAL CORPORATION

