

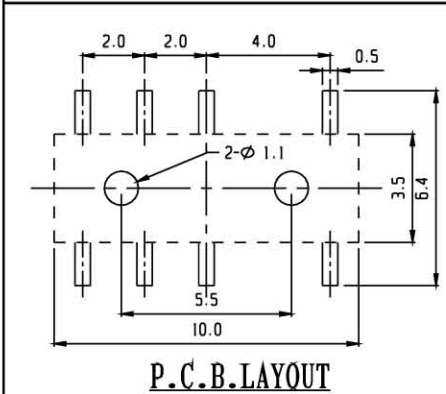
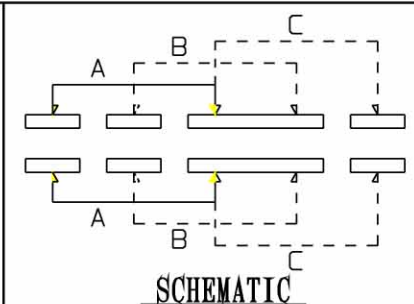
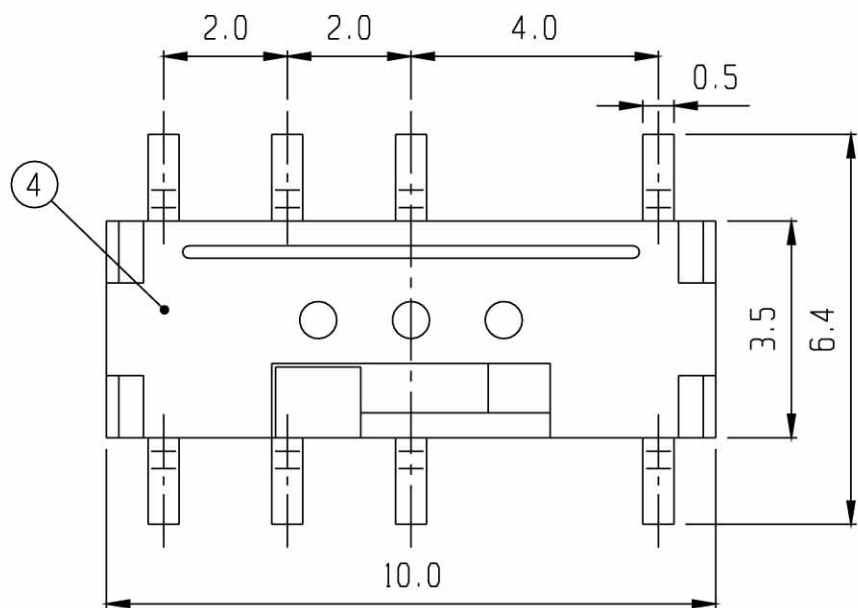


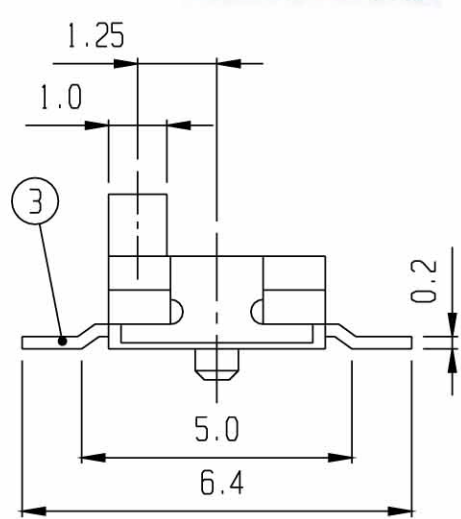

RoHS
Compliance

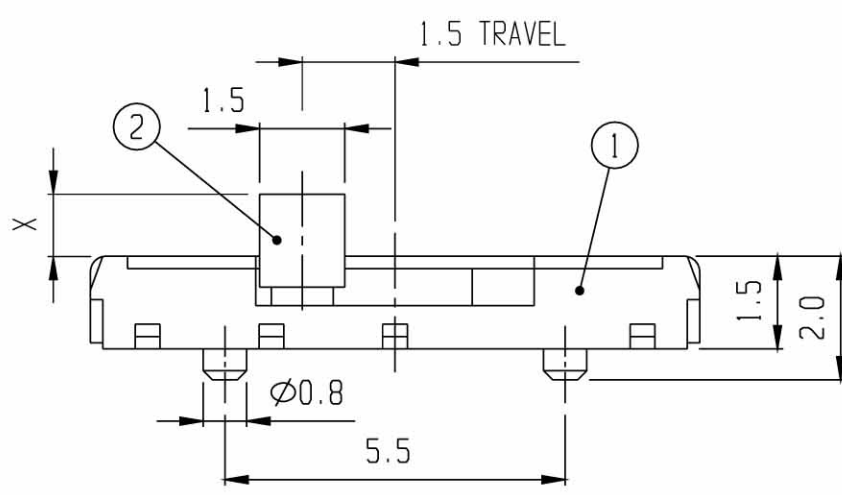

5	CONTACT	CuBe	2	Ag PLATED	6	SPRING PLATE	S U S	1	
3	TERMINAL	BRASS	8	Ag PLATED	4	COVER BOARD	S U S	1	
1	FRAME	NYLON 46	1		2	KNOB	NYLON 46	1	TG 1-5
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: MINIATURE SLIDE SWITCH (2P3T)							
	RATING: DC 12V 0.1A	MODEL NO: MSS-23C02							
	CONTACT RESISTANCE: 70mΩ max.								
	INSULATION RESISTANCE: 100MΩ AT 500V DC	TOLERANCE	UNIT: MM	DWN.	 				
	WITHSTAND VOLTAGE: AC 100V for 1 minute	UP TO 1.0:±0.1	SCALE: 8:1	CHK'D.					
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 04						
	SWITCHING LIFE: 10K cycles min.	OVER 10.0:±0.3	DRWG NO:	APPD.					

BY:
DATE: 24-AUG-2006

