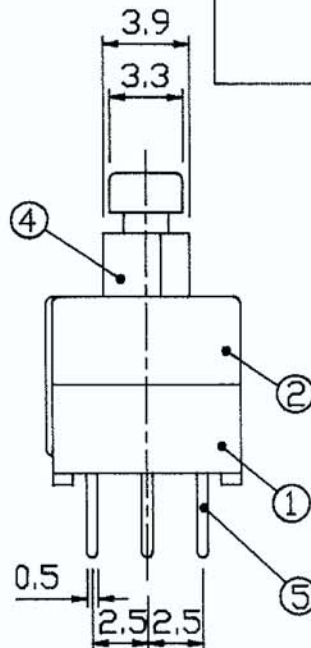
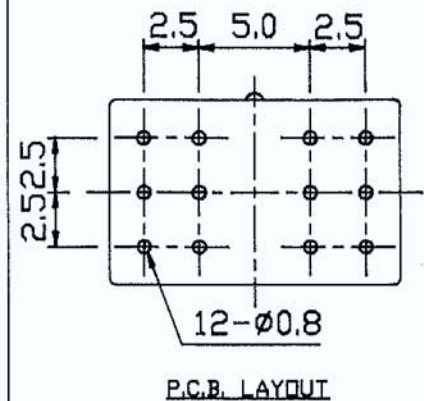
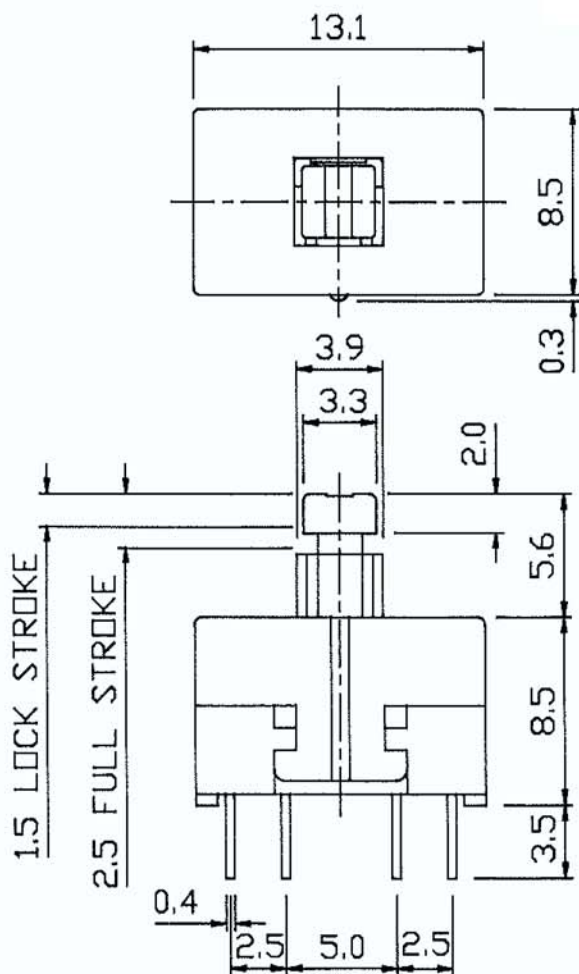



SCHEMATIC

7	HOOK	STEEL WIRE	1						
5	TERMINAL	BRASS	12	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	CONTACT	P B S	4	Ag PLATED	4	KNOB	P O M	1	
1	FRAME	A B S	1		2	FRAME	A B S	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: PUSH SLIDE SWITCH (4P2T) (LOCKABLE) (01A)			
BY:  DATE: 04-DEC-2000	RATING: DC 30V 0.1A	MODEL NO: PS-42E09L			
	CONTACT RESISTANCE: 70mΩ max.				
	INSULATION RESISTANCE: 100MΩ at 500V DC	UNIT: MM	DWN		
	WITHSTAND VOLTAGE: AC 250V for 1 minute.	SCALE: 3:1	CHK'D		
	OPERATION FORCE: REFER ATTACH SPECIFICATION	TOLERANCE: ±0.2	APP'D.		
	SWITCHING LIFE: 10K cycles min.				
Vimex International Corp. http://www.vimex.com		DRWG NO:			VERSION: 1