




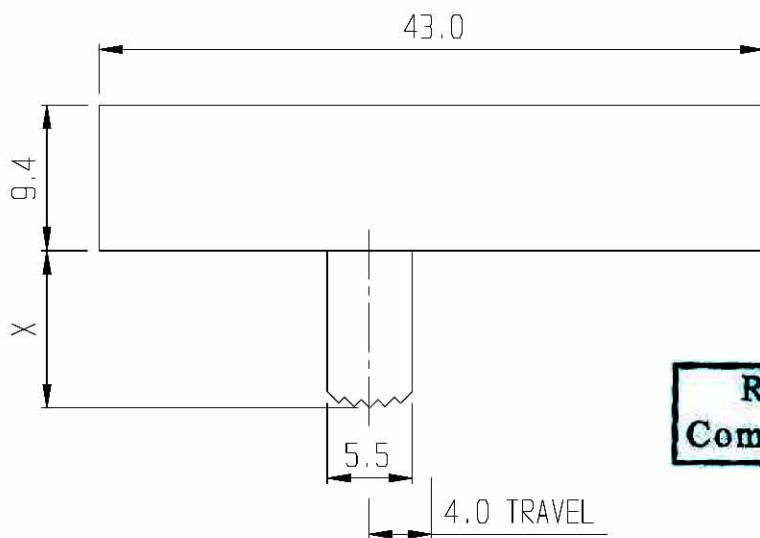




**RoHS
Compliance**

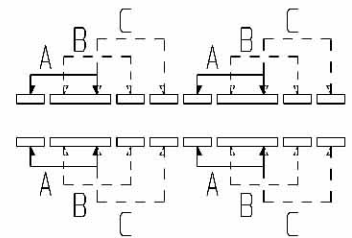

SCHEMATIC

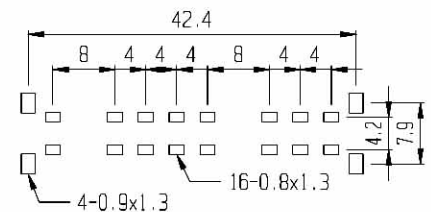

PCB LAYOUT

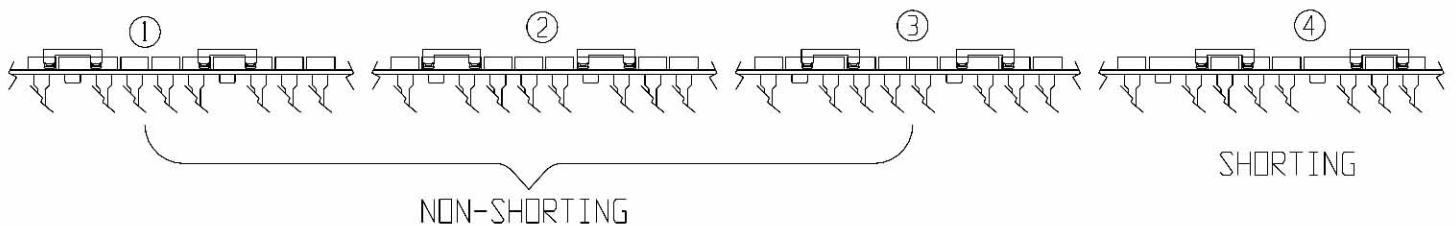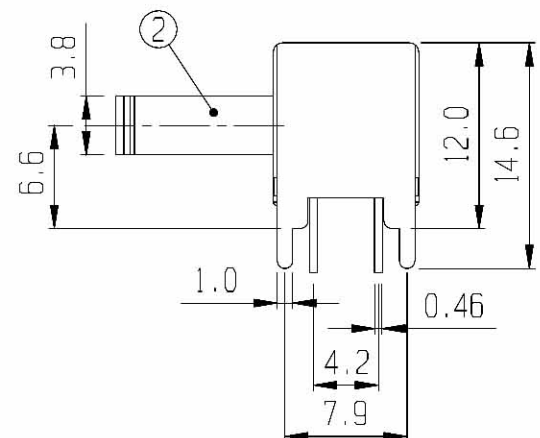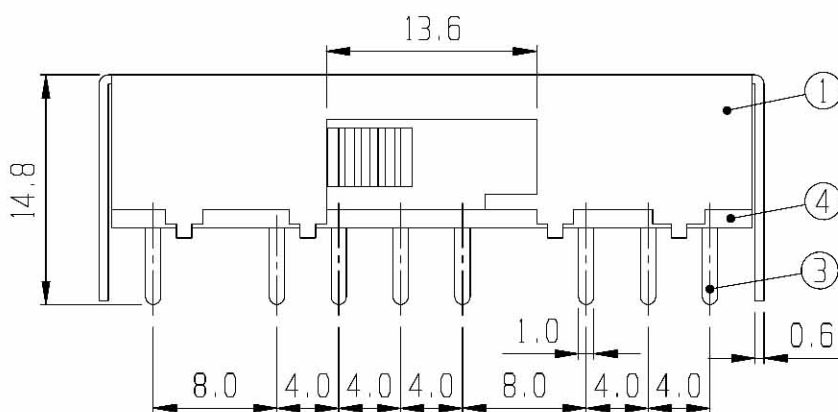

7	BALL	STEEL	1						
5	CONTACT	P B S	4	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	16	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P O M	1	G 2-15
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: SIDE KNOB SLIDE SWITCH (4P3T)
	RATING: DC 30V 0.3A	MODEL NO: SK-43H01
	CONTACT RESISTANCE: 30mΩ max.	
	INSULATION RESISTANCE: 500MΩ at 500V DC	TOLERANCE
	WITHSTAND VOLTAGE: AC 500V for 1 minute	UNIT: MM
	OPERATION FORCE: REFER ATTACH SPECIFICATION	UP TO 1.0:±0.1
	SWITCHING LIFE: 10K cycles min.	SCALE: 2:1
		VERSION: 01
		DRWG NO:

BY: 
DATE: 02-AUG-2006

