

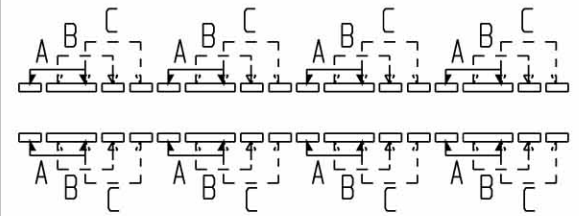




Shorting

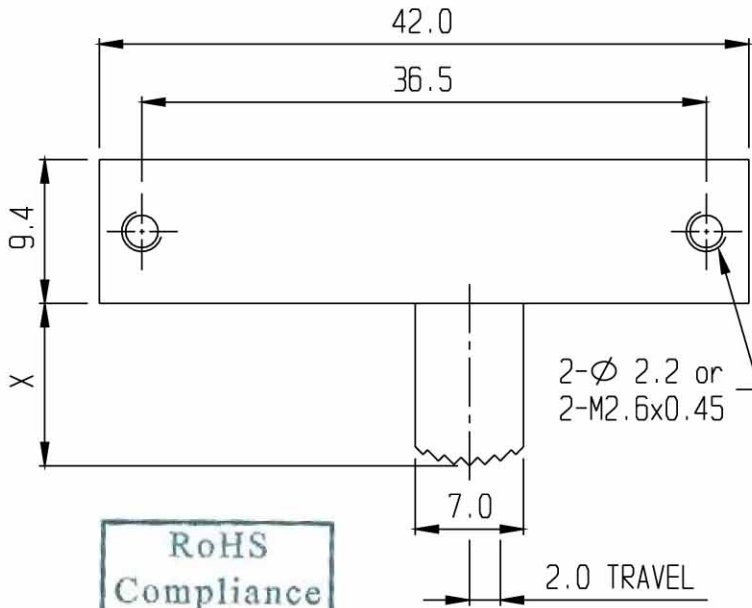

SCHEMATIC

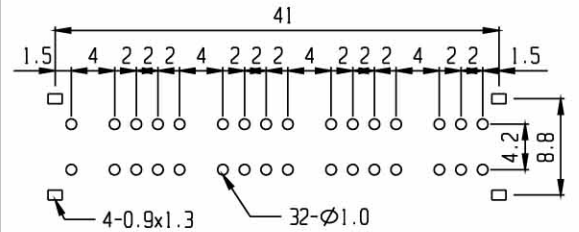

PCB LAYOUT

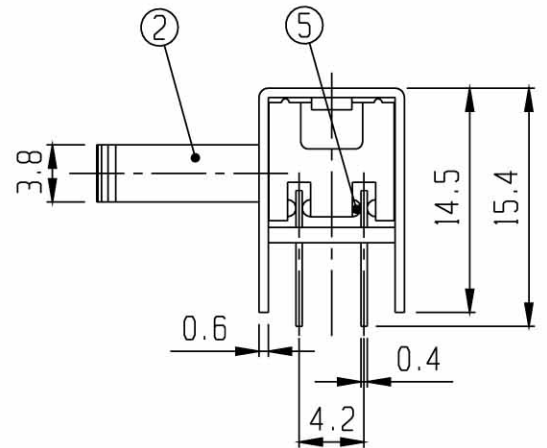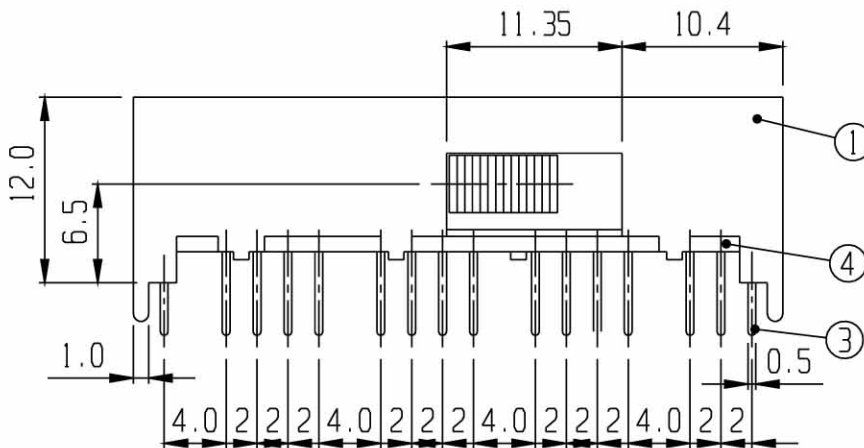

7	BALL	STEEL	1					
5	CONTACT	P B S	8	Ag PLATED	6	SPRING	STEEL WIRE	1
3	TERMINAL	BRASS	32	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P O M	1
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY
								REMARKS

ISSUED

SPECIFICATION

TITLE: SIDE KNOB SLIDE SWITCH (8P3T)

RATING: DC 30V 0.5A
 CONTACT RESISTANCE: 30m Ω max.
 INSULATION RESISTANCE: 500M Ω at 500V DC
 WITHSTAND VOLTAGE: AC 500V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 10K cycles min.

MODEL NO: SK-83D01

TOLERANCE: UP TO 1.0:±0.1
 UNIT: MM
 SCALE: 2:1
 VERSION: 01
 DRWG NO:

DWN.
 CHK'D.
 APPD.

BY:
 DATE: 05-APR-2006

VIMEX
 INTERNATIONAL CORPORATION

