


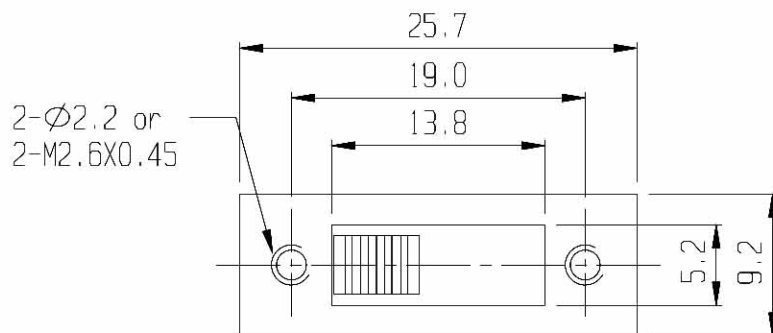





**RoHS
Compliance**

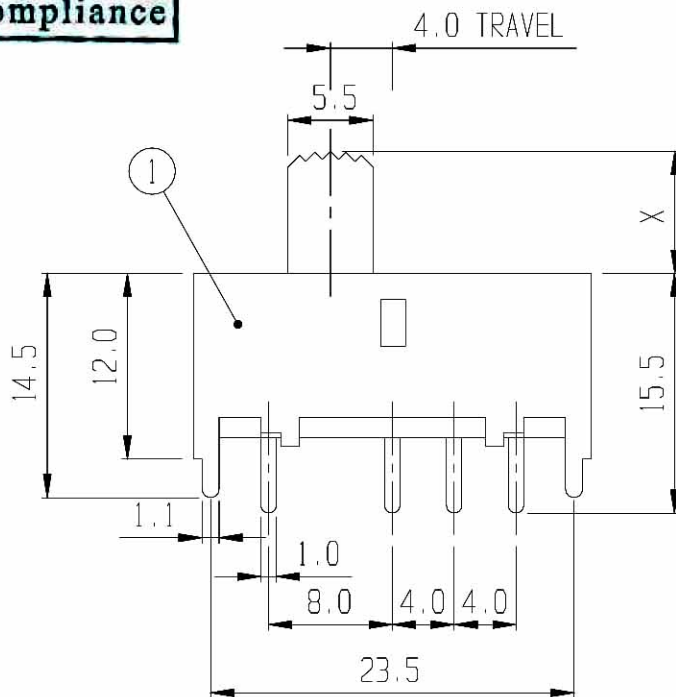

SCHEMATIC

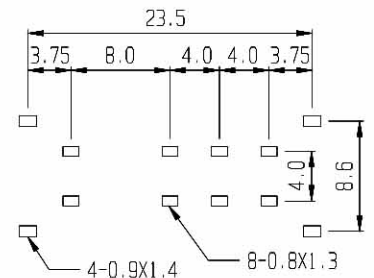

PCB LAYOUT

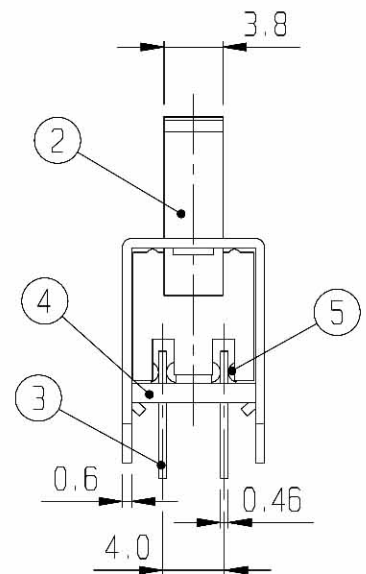

7	SPRING	STEEL WIRE	1						
5	CONTACT	P B S	2	Ag PLATED	6	BALL	STEEL	2	
3	TERMINAL	BRASS	8	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P O M	1	G 2-15
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: SLIDE SWITCH (2P3T)				
	RATING: DC 30V 0.5A	MODEL NO: SS-23H02				
	CONTACT RESISTANCE: 30mΩ max.					
	INSULATION RESISTANCE: 500MΩ at 500V DC	TOLERANCE	UNIT: MM	DWN.	hms	
	WITHSTAND VOLTAGE: AC 500V for 1 minute	UP TO 1.0:±0.1	SCALE: 2:1	CHK'D.	pm	
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 01			
	SWITCHING LIFE: 10K cycles min.	OVER 10.0:±0.3	DRWG NO:	APPD.	sh	

BY: 
DATE: 10-JUN-1999

