



800-227-0075

http://www.vimex.com

Part Number System

T 8 0 1 3 - S E C Q - E - S 2 0 - T 1 - 2

Switch Function (SPDT)				Actuator		Bushing			Termination		Contact	Epoxy Seal	Vertical Support Bracket		Cap/ Sealing Hood		Cap Color	
Model No.	Switching Position																	
																		
T8013	ON	none	ON	T	5.08	E	(STD)	8.89	B	solder lug	Q	(none)	(none)		E1	E bush	0	Clear
T8013A	ON	none	(ON)	X	13.97	M	non-thrd	8.89	C	pc 1.27	R		S20	11.68	E2	15/32	1	White
T8014	ON	OFF	ON	W	21.34	K	metric	8.89	D	quick con	G		S25	16.00	K1	K bush	2	Black
T8014A	(ON)	OFF	(ON)	V	16.26	F		7.10	D1	wire wrap (19.05)	K		S35	11.68			3	Red
T8014B	ON	OFF	(ON)	Y	21.34	N	non-thrd	7.10	D3	wire wrap (10.8)			S40	16.00			4	Yellow
Term Comm	2-3	open	2-1	Flatted Toggle		G		7.52					Sanp-In Brackets		T1	10.29 actuator S	5	Blue
				U	11.43	G1	non-thrd	7.52					V20	11.68	T2	7.28 actuator T	6	Green
				U1	7.20	H		8.00					V25	16.00			7	Orange
				U2	21.30	H1	non-thrd	8.00					V35	11.68				
				15/32 bush		J	(long)	9.60					V40	16.00				
				Z	11.68	J1	non-thrd	9.60										
				Z1	17.45	L	splash-prf	7.47										
				Locking Lever		none												
				LK	Round	No code if Z/Z1/LK/LK1 actuator unless splash proof or non-thread chosen												
				LK1	Flat top													

See following pages for details

				Description:	Build a part number.
Page:	1	Date:	2003-12-17	P/N	T8013
of:	7	Revision:	1.0		



800-227-0075

<http://www.vimex.com>

Part Number System

Actuator Options						Y handle color code	Color
S (standard)	T (standard)	X (long)	W (long)	V (long)	Y (plastic)		
Actuator height shown assumes 'E' bushing. Height dimension will be different with other bushings						Black (2) is standard inquire for availability.	

Flatted Actuators (only available with 'H' or 'H1' or 'H2' bushing)		
U (standard)	U1 (short)	U2 (long)

				Description:	Build a part number.
Page:	2	Date:	2003-12-17	P/N	T8013
of:	7	Revision:	1.0		

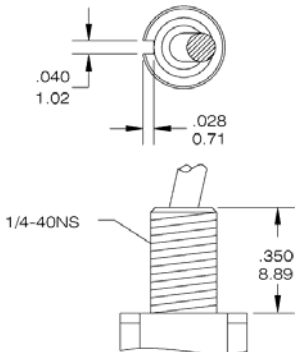
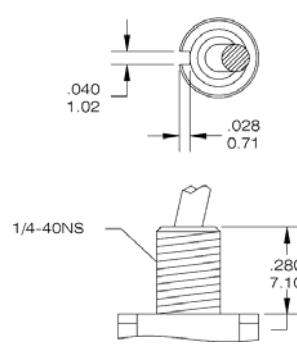
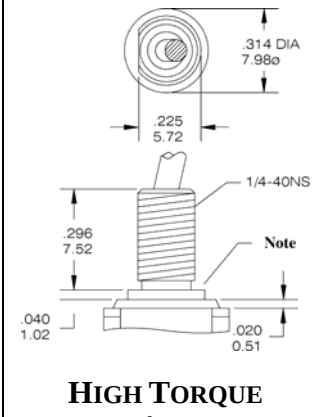
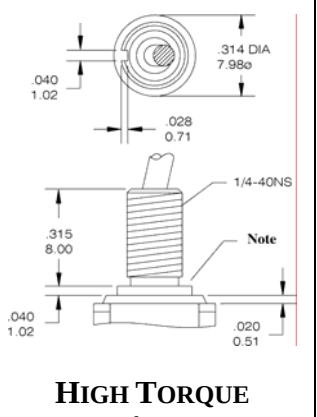
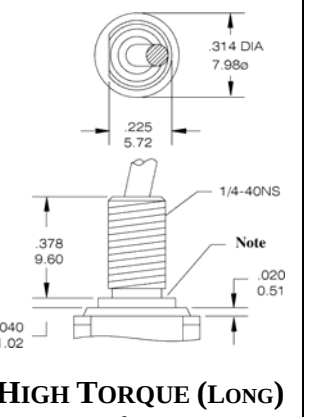
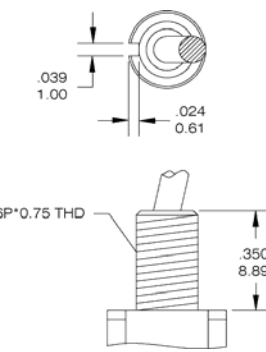




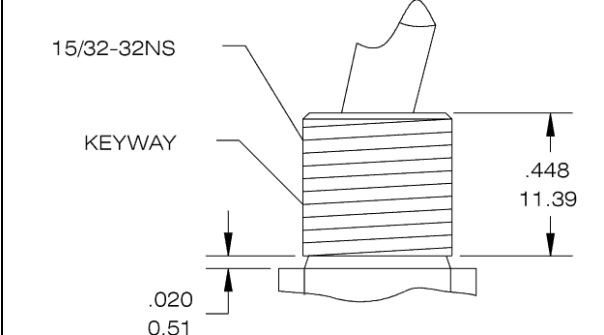
Part Number System

Large Toggle Lever		Locking Lever	
Z	Z1	LK (round top)	LK1 (flat top)
Bushing option code not required unless 'L' splashproof bushing is ordered		Bushing option code not required unless: (1) 'L' splashproof bushing ordered (i.e. LKL or LK1L) (2) non-thread bushing required choose bushing code 'N' (i.e. LKN or LK1N) Locking Levers ONLY available with ON-ON or ON-OFF-ON action.	

Toggle Cap Option		Toggle Cap Color Option	
T1 (for 'S' actuator only)	T2 (for 'T' actuator only)	Code	Color
		0	Transparent
		1	White
		2	Black
		3	Red
		4	Yellow
		5	Blue
		6	Green
		7	Orange

				Description:	Build a part number.
Page:	3	Date:	2003-12-17	P/N	T8013
of:	7	Revision:	1.0		

Part Number System








Bushing Option					
E threaded (standard) M non-thread	F threaded N non-thread	G threaded (standard) G1 non-thread	H threaded (standard) H1 non-thread H2 Metric	J threaded (standard) J1 non-thread	K Metric
		 HIGH TORQUE Note: manufacturing option produces relief or imperfect thread	 HIGH TORQUE Note: manufacturing option produces relief or imperfect thread	 HIGH TORQUE (LONG) Note: manufacturing option produces relief or imperfect thread	
Splash proof Solution				Large Toggle (Z or Z1 actuator)	
L				Internal actuator seal standard. Bushing seal washer available	
					
Page:		Date:		Description:	Build a part number.
4	7	2003-12-17	Revision:	P/N	T8013

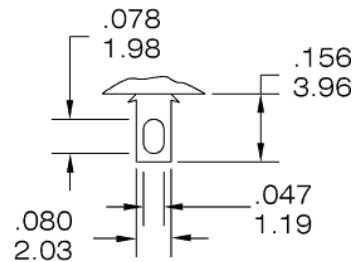
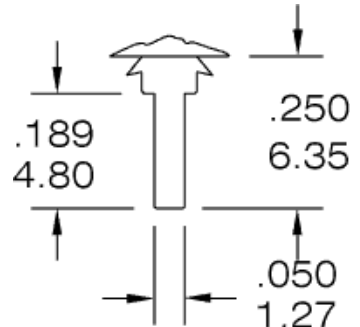
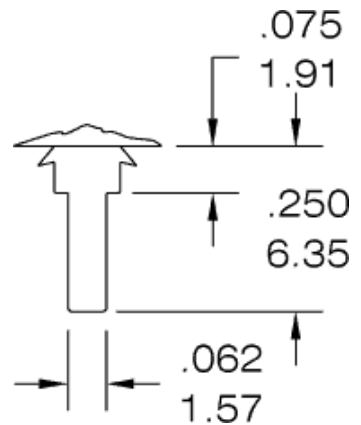
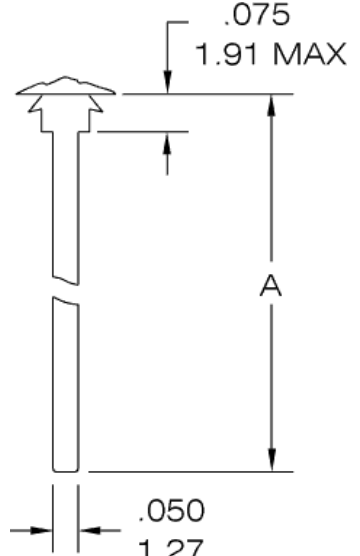


800-227-0075

<http://www.vimex.com>

Part Number System

Panel Mounting						
1/4" Bushing			Metric Bushing		15/32" Bushing	
						
keyway	flatted D	with locking ring	keyway	with locking ring	keyway	with locking ring

Terminal Option					
'B' solder lug	'C' printed circuit	'D' quick connect	'D1' or 'D2' wirewrap	Wirewrap terminal code	A dimension
				D1	.750" 19.05mm
				D2	.425 10.8mm

Description:		Build a part number.	
P/N		T8013	

Page:	5	Date:	2003-12-17
of:	7	Revision:	1.0



800-227-0075

<http://www.vimex.com>

Part Number System

Contact Material Options

Code	Contact Material	Terminal Material	Rating
Q	Silver plated	Silver plated	5A @ 120VAC or 28VDC; 2A @ 250VAC
R	Gold plated over nickel plated	Gold plated over nickel plated	0.4VA max. @ 20VAC or VDC max.
G	Gold plated over silver plated	Gold plated over silver plated	0.4VA max. @ 20VAC or VDC max. or 5A @ 120VAC or 28VDC; 2A @ 250VAC
K	Gold plated over nickel plated	Tin-lead over nickel plated	0.4VA max. @ 20VAC or VDC max.

Vertical Support Bracket Option

S20 / S25 / V20 / V25 / S35 / S40 / V35 / V40

					Option code	'A' dimension
					S20/V20	.460" 11.68mm
					S25/V25	.630" 16.00mm
					V20/V25 are snap in type	
					Option code	'A' dimension
					S35/V35	.460" 11.68mm
					S40/V40	.630" 16.00mm
					V35/V40 are snap in type	

Description:

Build a part number.

Page:	6	Date:	2003-12-17
of:	7	Revision:	1.0

P/N







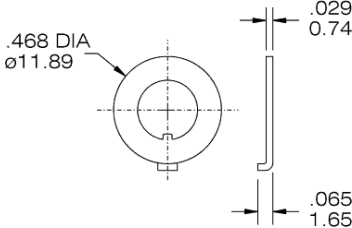

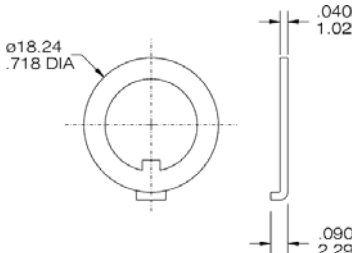
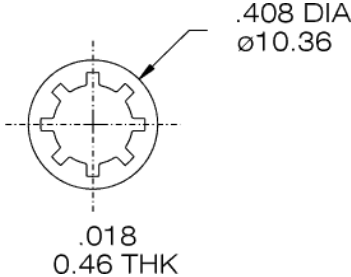
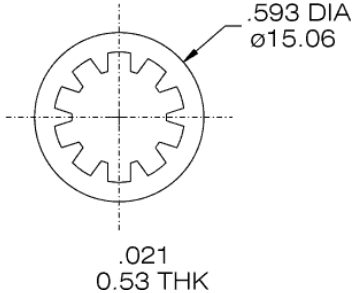
T8013



800-227-0075

<http://www.vimex.com>

Part Number System

Hardware					
1/4-40NS hex (standard)	1/4-40NS DRESS NUT	Metric hex	15/32-32NS hex (std.)	15/32-32NS DRESS NUT	15/32-32NS hex
					
1/4" & M6 Lock Ring	Flatted bush Lock Ring	15/32" Lock Ring	1/4" & M6 Lock Washer	15/32" Lock Washer	
					

				Description:	Build a part number.
Page:	7	Date:	2003-12-17	P/N	T8013
of:	7	Revision:	1.0		