



800-227-0075

http://www.vimex.com

Part Number System

T 8 0 2 1 L - S - E - Q - E - S - T 1 - 2

Switch Function (DPDT)				Actuator		Bushing		Contact	Epoxy Seal	Support Bracket Type		Actuator Cap		Cap Color	
Model No.	Switching Position														
				S	10.41	E	(STD)	8.89	Q	(none)	(none)	T1	10.29 actuator S	0	Clear
T8021L	ON	none	ON	T	5.08	M	non-thrd	8.89	R	E	S	T2	7.28 actuator T	1	White
T8021LA	ON	none	(ON)	X	13.97	K	metric	8.89	G					2	Black
T8022L	ON	OFF	ON	W	21.34	F		7.10	K					3	Red
T8022LA	(ON)	OFF	(ON)	V	16.26	N	non-thrd	7.10						4	Yellow
T8022LB	ON	OFF	(ON)	Flatted Toggle		G		7.52						5	Blue
Term Comm	2-3,5-6	open	2-1,5-4	U	11.43	G1	non-thrd	7.52						6	Green
				U1	7.20	H		8.00						7	Orange
				Locking Lever		H1	non-thrd	8.00							
				LK	Round	J	(long)	9.60							
				LK1	Flat top	J1	non-thrd	9.60							
						L	splash-prf	7.47							
						none									
						No code if LK/LK1 actuator unless splash proof or non-thread chosen									

See following pages for details

Page: 1				Description:	Build a part number.
of: 5				P/N	T8021L
Date: 2003-12-17					
Revision: 1.0					



800-227-0075

<http://www.vimex.com>

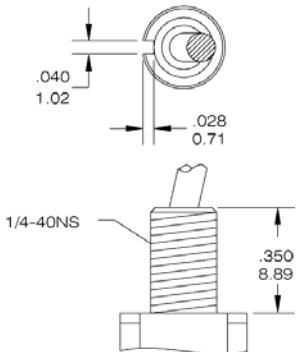
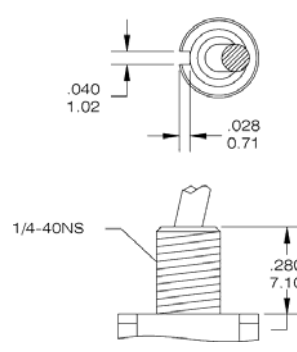
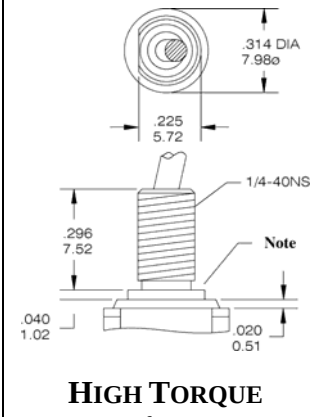
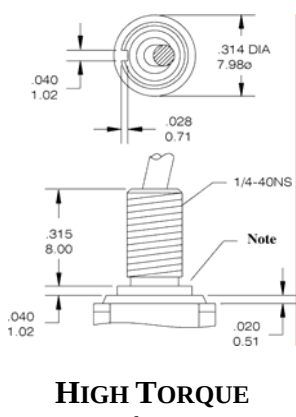
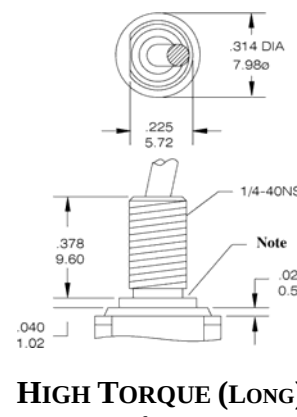
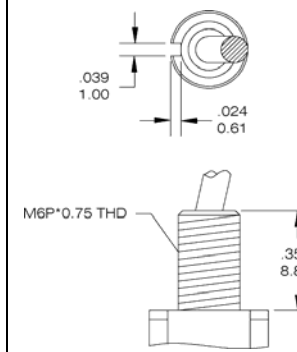
Part Number System

Actuator Options				
S (standard)	T (standard)	X (long)	W (long)	V (long)
Flatted Actuators (only available with 'H' or 'H1' or 'H2' bushing)			Locking Lever	
U (standard)	U1 (short)		LK (round top)	LK1 (flat top)
Bushing option code not required unless 'L' splashproof bushing is ordered			Bushing option code not required unless: (1) 'L' splashproof bushing ordered (i.e. LKL or LK1L) (2) non-thread bushing required choose bushing code 'N' (i.e. LKN or LK1N) Locking Levers ONLY available with ON-ON or ON-OFF-ON action.	

				Description:	Build a part number.
Page:	2	Date:	2003-12-17	P/N	T8021L
of:	5	Revision:	1.0		

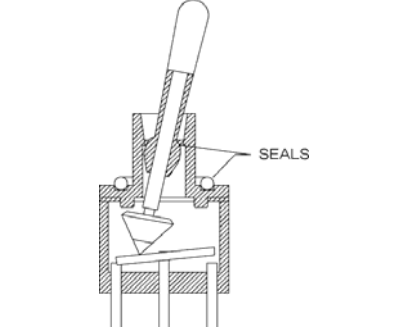
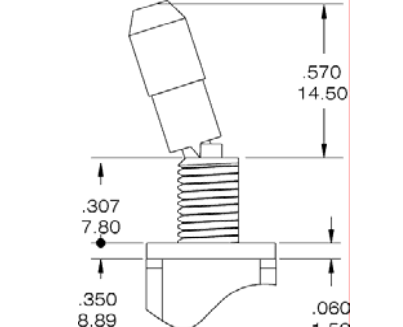
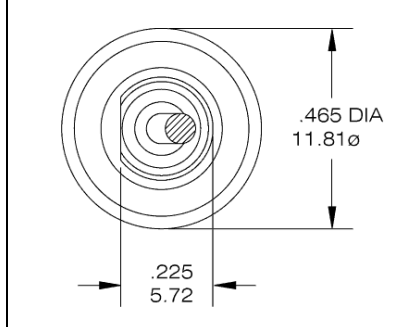
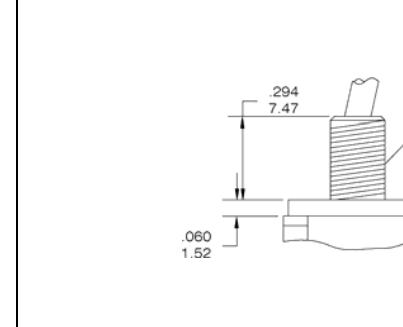
Part Number System

Bushing Option

E threaded (standard) M non-thread	F threaded N non-thread	G threaded (standard) G1 non-thread	H threaded (standard) H1 non-thread H2 Metric	J threaded (standard) J1 non-thread	K Metric
		 HIGH TORQUE Note: manufacturing option produces relief or imperfect thread	 HIGH TORQUE Note: manufacturing option produces relief or imperfect thread	 HIGH TORQUE (LONG) Note: manufacturing option produces relief or imperfect thread	

Splash proof Solution

L

			
--	---	--	---

Description:

Build a part number.

Page: 3

Date: 2003-12-17

of: 5

Revision: 1.0

P/N

T8021L



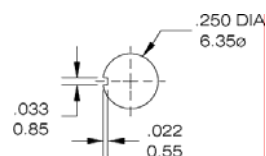
800-227-0075

<http://www.vimex.com>

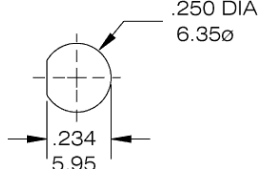
Part Number System

Panel Mounting


1/4" Bushing



keyway

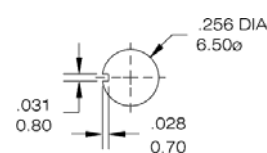


flatted D




with locking ring

Metric Bushing



keyway



with locking ring

Contact Material Options

Code	Contact Material	Terminal Material	Rating
Q	Silver plated	Silver plated	5A @ 120VAC or 28VDC; 2A @ 250VAC
R	Gold plated over nickel plated	Gold plated over nickel plated	0.4VA max. @ 20VAC or VDC max.
G	Gold plated over silver plated	Gold plated over silver plated	0.4VA max. @ 20VAC or VDC max. or 5A @ 120VAC or 28VDC; 2A @ 250VAC
K	Gold plated over nickel plated	Tin-lead over nickel plated	0.4VA max. @ 20VAC or VDC max.

Description:

Build a part number.

Page:

4

Date:

2003-12-17

P/N

T8021L

of:

5

Revision:

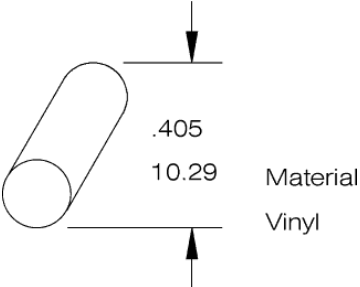
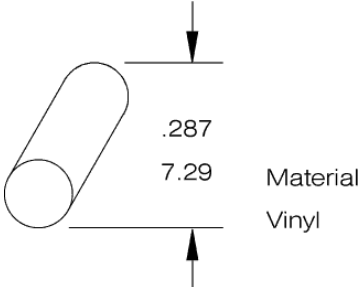
1.0









800-227-0075

<http://www.vimex.com>

Part Number System

Toggle Cap Option		Toggle Cap Color Option	
T1 (for 'S' actuator only)	T2 (for 'T' actuator only)	Code	Color
		0	Transparent
		1	White
		2	Black
		3	Red
		4	Yellow
		5	Blue
		6	Green
		7	Orange

Hardware					
1/4-40NS hex (standard)	1/4-40NS DRESS NUT	Metric hex	1/4" & M6 Lock Ring	Flatted bush Lock Ring	1/4" & M6 Lock Washer
					

				Description:	Build a part number.
Page:	5	Date:	2003-12-17	P/N	T8021L
of:	5	Revision:	1.0		