



800-227-0075

<http://www.vimex.com>

Part Number System

T 8 2 2 L - S - E - Q - E - S - T 1 - 2

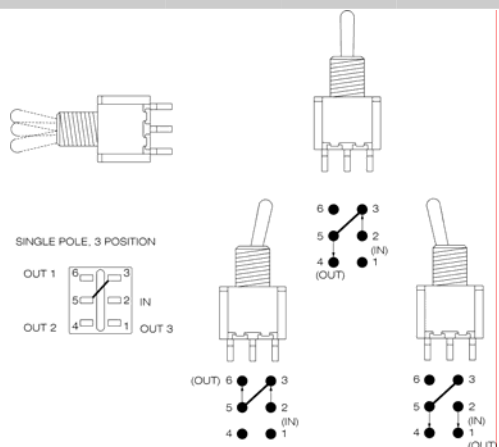
Three Way Switch Function (SP3T)				Actuator		Bushing			Contact	Epoxy Seal	Support Bracket Type		Actuator Cap		Cap Color	
Model No.	Switching Position															
				S	10.41	E	(STD)	8.89	Q	(none)	(none)		T1	10.29 actuator S	0	Clear
T822L	ON	ON	ON	T	5.08	M	non-thrd	8.89	R	E	S	snap-in type	T2	7.28 actuator T	1	White
T822LB	ON	ON	(ON)	X	13.97	K	metric	8.89	G						2	Black
Term Comm	2-3,5-6	2-3,5-4	2-1,5-4	W	21.34	F		7.10	K						3	Red
				V	16.26	N	non-thrd	7.10							4	Yellow
				Flatted Toggle		G		7.52							5	Blue
				U	11.43	G1	non-thrd	7.52							6	Green
				U1	7.20	H		8.00							7	Orange
				Locking Lever		H1	non-thrd	8.00								
				LK	Round	J	(long)	9.60								
				LK1	Flat top	J1	non-thrd	9.60								
						L	splash-prf	7.47								
						none										
						No code if LK/LK1 actuator unless splash proof or non-thread chosen										

SINGLE POLE, 3 POSITION

OUT 1 6 3
5 2 IN
OUT 2 4 1 OUT 3

(OUT) 6 3
5 2 (IN)
4 1

(OUT) 6 3
5 2 (IN)
4 1



See following pages for details

				Description:	Build a part number.
Page:	1	Date:	2003-12-17	P/N	T822L
of:	5	Revision:	1.0		



800-227-0075

<http://www.vimex.com>

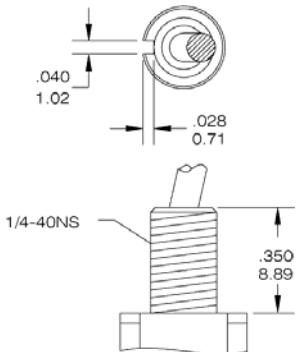
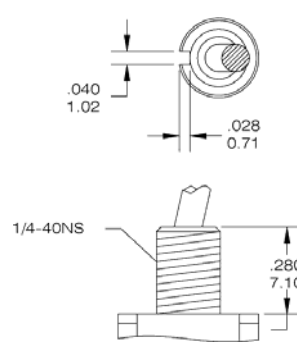
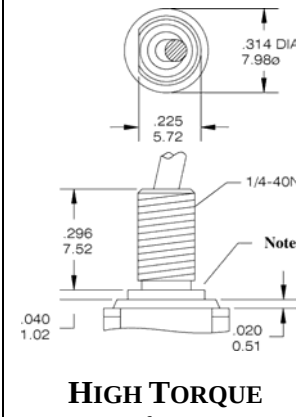
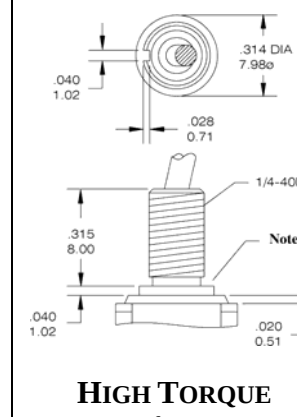
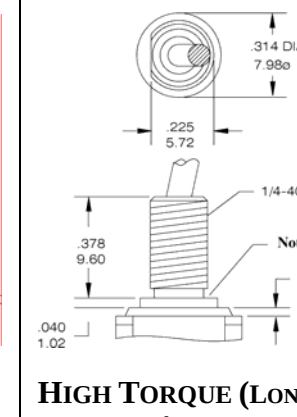
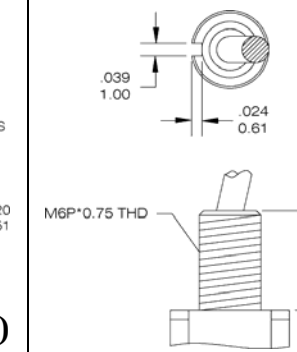
Part Number System

Actuator Options				
S (standard)	T (standard)	X (long)	W (long)	V (long)
Flatted Actuators (only available with 'H' or 'H1' or 'H2' bushing)			Locking Lever	
U (standard)	U1 (short)		LK (round top)	LK1 (flat top)
Bushing option code not required unless 'L' splashproof bushing is ordered			Bushing option code not required unless: (1) 'L' splashproof bushing ordered (i.e. LKL or LK1L) (2) non-thread bushing required choose bushing code 'N' (i.e. LKN or LK1N) Locking Levers ONLY available with ON-ON or ON-OFF-ON action.	

				Description:	Build a part number.
Page:	2	Date:	2003-12-17	P/N	T822L
of:	5	Revision:	1.0		

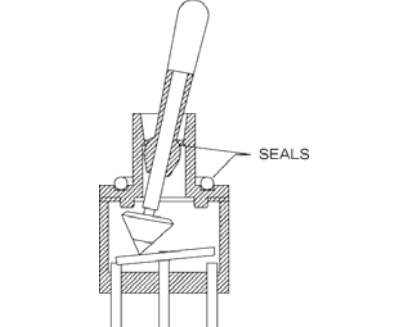
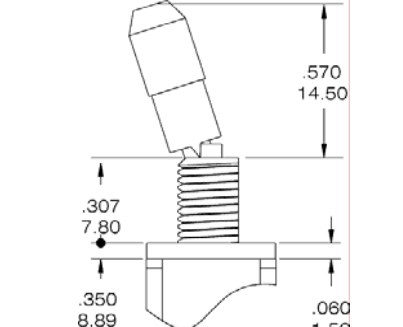
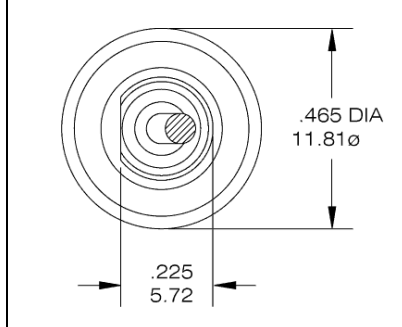
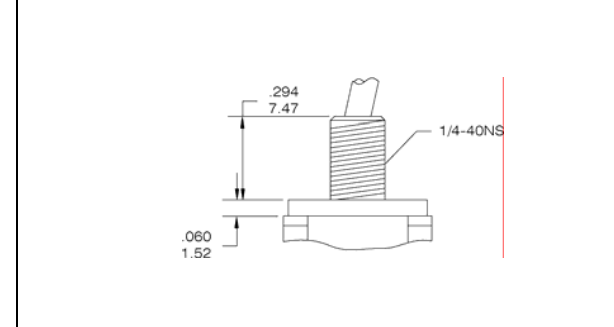
Part Number System

Bushing Option

E threaded (standard) M non-thread	F threaded N non-thread	G threaded (standard) G1 non-thread	H threaded (standard) H1 non-thread H2 Metric	J threaded (standard) J1 non-thread	K Metric
 1/4-40NS	 1/4-40NS	 1/4-40NS HIGH TORQUE Note: manufacturing option produces relief or imperfect thread	 1/4-40NS HIGH TORQUE Note: manufacturing option produces relief or imperfect thread	 1/4-40NS HIGH TORQUE (LONG) Note: manufacturing option produces relief or imperfect thread	 M6P*0.75 THD

Splash proof Solution

L

 SEALS			
---	---	--	---

Description:

Build a part number.

Page:

3

Date:

2003-12-17

of:

5

Revision:

1.0

P/N

T822L



800-227-0075

<http://www.vimex.com>

Part Number System

Panel Mounting

1/4" Bushing		Metric Bushing	
keyway	flatted D	with locking ring	keyway
		with locking ring	

Contact Material Options

Code	Contact Material	Terminal Material	Rating
Q	Silver plated	Silver plated	5A @ 120VAC or 28VDC; 2A @ 250VAC
R	Gold plated over nickel plated	Gold plated over nickel plated	0.4VA max. @ 20VAC or VDC max.
G	Gold plated over silver plated	Gold plated over silver plated	0.4VA max. @ 20VAC or VDC max. or 5A @ 120VAC or 28VDC; 2A @ 250VAC
K	Gold plated over nickel plated	Tin-lead over nickel plated	0.4VA max. @ 20VAC or VDC max.



				Description:	Build a part number.
Page:	4	Date:	2003-12-17	P/N	T822L
of:	5	Revision:	1.0		











800-227-0075

<http://www.vimex.com>

Part Number System

Toggle Cap Option		Toggle Cap Color Option	
T1 (for 'S' actuator only)	T2 (for 'T' actuator only)	Code	Color
 .405 10.29 Material Vinyl	 .287 7.29 Material Vinyl	0	Transparent
		1	White
		2	Black
		3	Red
		4	Yellow
		5	Blue
		6	Green
		7	Orange

Hardware					
1/4-40NS hex (standard)	1/4-40NS DRESS NUT	Metric hex	1/4" & M6 Lock Ring	Flatted bush Lock Ring	1/4" & M6 Lock Washer
 .312 7.92 1/4-40NS  .062 1.57	 .352 8.94 1/4-40UNS  .372 DIA 9.45ø .118 3.00	 .409 10.39 M6P 0.75 THD. .354 8.99  .062 1.57	 .468 DIA ø11.89  .029 0.74 .065 1.65	 .468 DIA ø11.89  .029 0.74 .065 1.65	 .408 DIA ø10.36  .018 0.46 THK

				Description:	Build a part number.
Page:	5	Date:	2003-12-17	P/N	T822L
of:	5	Revision:	1.0		