




800-227-0075

http://www.vimex.com

# Part Number System

T 8 4 5 P - S - E - Q - E - S - T 1 - 2

Three Way Switch Function (DP3T)			
Model No.	Switching Position		
	T845P	ON	ON
Term Comm	2-3,5-6 8-9,11-12	2-3,5-4 8-9,11-10	2-1,5-4 8-7,11-10

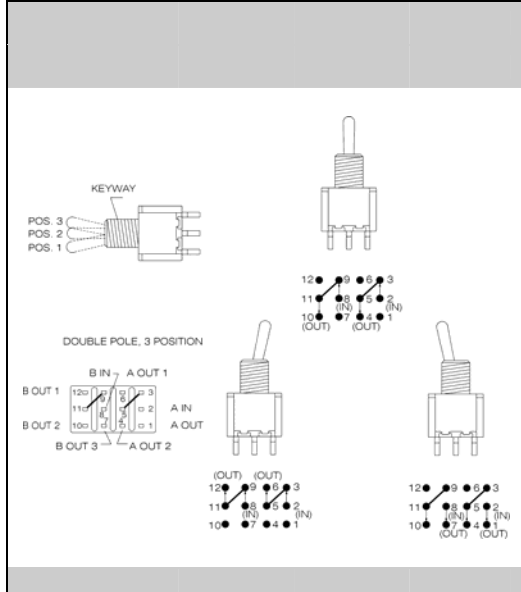

Actuator	
S	10.41
T	5.08
X	13.97
W	21.34
V	16.26
Flatted Toggle	
U	11.43
U1	7.20
Locking Lever	
LK	Round
LK1	Flat top

Bushing		
E	(STD)	8.89
M	non-thrd	8.89
K	metric	8.89
F		7.10
N	non-thrd	7.10
G		7.52
G1	non-thrd	7.52
H		8.00
H1	non-thrd	8.00
J	(long)	9.60
J1	non-thrd	9.60
L	splash-prf	7.47
none		
No code if LK/LK1 actuator unless splash proof or non-thread chosen		

Contact
Q
R
G
K

Epoxy Seal
(none)
E

Support Bracket Type	
(none)	
S	snap-in type

Actuator Cap	
T1	10.29 actuator S
T2	7.28 actuator T

Cap Color	
0	Clear
1	White
2	Black
3	Red
4	Yellow
5	Blue
6	Green
7	Orange

See following pages for details

Page:	1	Date:	2003-12-17	Description:	Build a part number.
of:	5	Revision:	1.0	P/N	T845P



800-227-0075

http://www.vimex.com

# Part Number System

Actuator Options				
S (standard)	T (standard)	X (long)	W (long)	V (long)
Flatted Actuators (only available with 'H' or 'H1' or 'H2' bushing)			Locking Lever	
U (standard)	U1 (short)	LK (round top)	LK1 (flat top)	
Bushing option code not required unless 'L' splashproof bushing is ordered			Bushing option code not required unless: (1) 'L' splashproof bushing ordered (i.e. LKL or LK1L) (2) non-thread bushing required choose bushing code 'N' (i.e. LKN or LK1N) Locking Levers ONLY available with ON-ON or ON-OFF-ON action.	

Page:	2	Date:	2003-12-17	Description:	Build a part number.
of:	5	Revision:	1.0	P/N	T845P



800-227-0075

http://www.vimex.com

# Part Number System

## Bushing Option

E threaded (standard) M non-thread	F threaded N non-thread	G threaded (standard) G1 non-thread	H threaded (standard) H1 non-thread H2 Metric	J threaded (standard) J1 non-thread	K Metric

## Splash proof Solution

### L

--	--	--	--

Description:

Build a part number.

Page:	3	Date:	2003-12-17
of:	5	Revision:	1.0

P/N

T845P



800-227-0075

http://www.vimex.com

# Part Number System

## Panel Mounting

1/4" Bushing		Metric Bushing		
<p>keyway</p>	<p>flatted D</p>	<p>with locking ring</p>	<p>keyway</p>	<p>with locking ring</p>

## Contact Material Options

Code	Contact Material	Terminal Material	Rating
Q	Silver plated	Silver plated	5A @ 120VAC or 28VDC; 2A @ 250VAC
R	Gold plated over nickel plated	Gold plated over nickel plated	0.4VA max. @ 20VAC or VDC max.
G	Gold plated over silver plated	Gold plated over silver plated	0.4VA max. @ 20VAC or VDC max. <i>or</i> 5A @ 120VAC or 28VDC; 2A @ 250VAC
K	Gold plated over nickel plated	Tin-lead over nickel plated	0.4VA max. @ 20VAC or VDC max.

Page:	4	Date:	2003-12-17	Description:	Build a part number.
of:	5	Revision:	1.0	P/N	T845P



800-227-0075

http://www.vimex.com

# Part Number System

Toggle Cap Option		Toggle Cap Color Option	
T1 (for 'S' actuator only)	T2 (for 'T' actuator only)	Code	Color
<p>.405 10.29 Material Vinyl</p>	<p>.287 7.29 Material Vinyl</p>	0	Transparent
		1	White
		2	Black
		3	Red
		4	Yellow
		5	Blue
		6	Green
		7	Orange

Hardware					
1/4-40NS hex (standard)	1/4-40NS DRESS NUT	Metric hex	1/4" & M6 Lock Ring	Flatted bush Lock Ring	1/4" & M6 Lock Washer
<p>.312 7.92 1/4-40NS .062 1.57</p>	<p>.352 8.94 1/4-40UNS .372 DIA 9.45 .118 3.00</p>	<p>.409 10.39 M6P 0.75 THD .354 8.99 .062 1.57</p>	<p>.029 0.74 .468 DIA ø11.89 .065 1.65</p>	<p>.029 0.74 .468 DIA ø11.89 .065 1.65</p>	<p>.408 DIA ø10.36 .018 0.46 THK</p>

Page:	5	Date:	2003-12-17	Description:	Build a part number.
of:	5	Revision:	1.0	P/N	T845P