
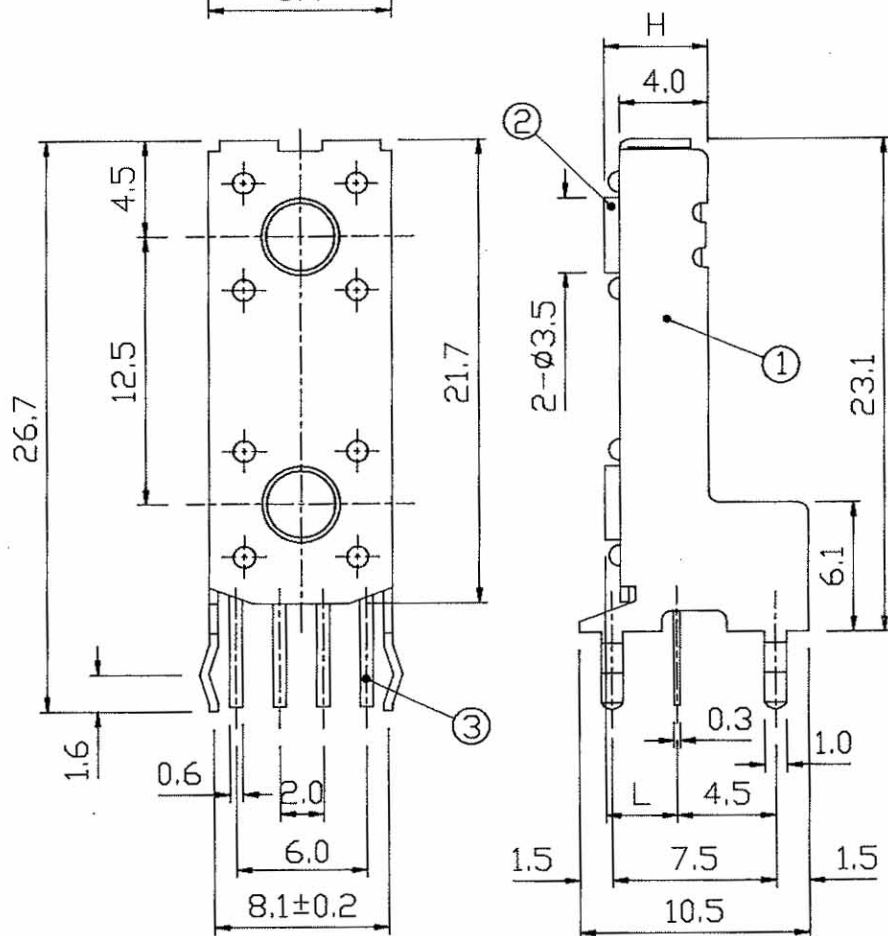
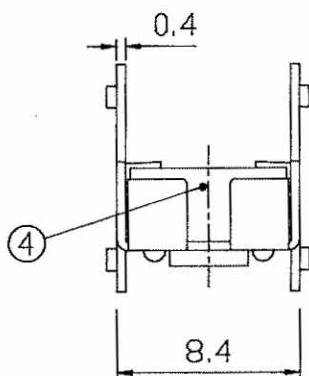





SCHEMATIC



PCB LAYOUT

MODEL NO.	H	Knob(L)
TC-00100-02	4.80	3.15
TC-00100(A)-02	5.50	3.85
TC-00100(B)-02	7.80	6.15
TC-00100(C)-02	10.00	8.35
TC-00100(D)-02	13.5	11.85
TC-00100(E)-02	7.50	5.85
TC-00100(F)-02	8.50	6.85
TC-00100(G)-02	12.5	11.35
TC-00100(H)-02	14.00	12.35

5	SPRING	P B S	2	Ag PLATED					
3	TERMINAL	B S P	4	Ag PLATED	4	PEDESTAL	NYLON	1	
1	FRAME	S U S	1		2	KNOB	NYLON	2	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION		TITLE: TACT SWITCH (01A)	
BY 	RATING: DC 12V 50mA		MODEL NO: TC-00100-02	
	CONTACT RESISTANCE: 100mΩ Max		UNIT: MM	DWN 
	INSULATION RESISTANCE: 100MΩ at 100V DC		SCALE: 3:1	CHK'D 
	WITHSTAND VOLTAGE: AC 250V for 1 Min.		TOLERANCE: ±0.2	APPD. 
	OPERATION FORCE: REFER ATTACH SPECIFICATION			
	SWITCHING LIFE: 100k Cycles Min.			
DATE: 05-AUG-1999			DRWG NO: VERSION: P	