







RoHS
Compliance

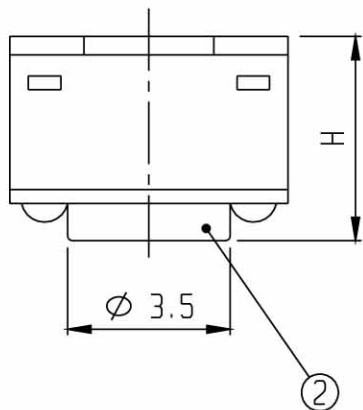

SCHEMATIC



PCB LAYOUT

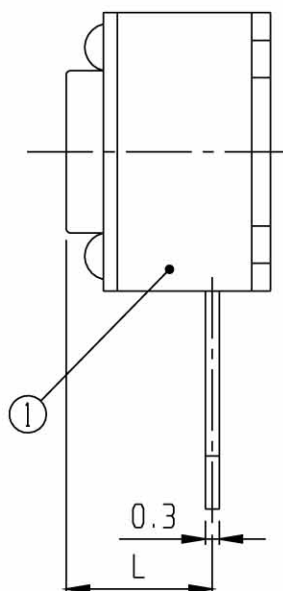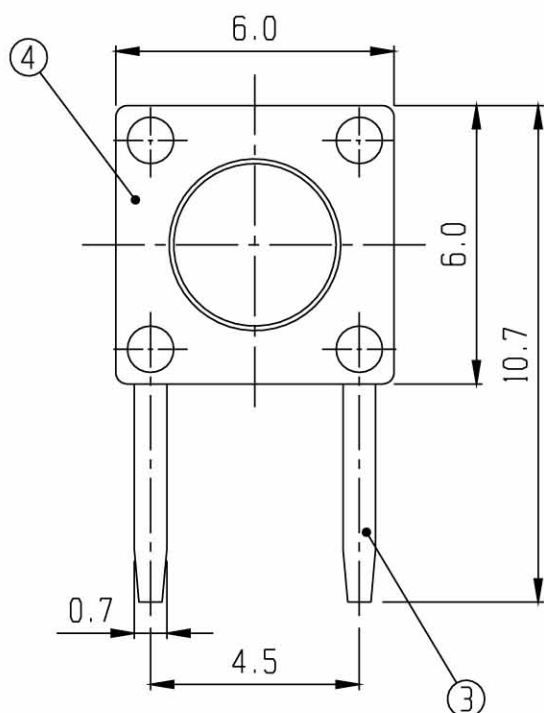

MODEL NO.	H	Knob(L)
TC-00107-00	4.30	3.15
TC-00107(A)-00	5.00	3.85
TC-00107(B)-00	7.30	6.15
TC-00107(C)-00	9.50	8.35
TC-00107(D)-00	13.00	11.85
TC-00107(E)-00	7.00	5.85
TC-00107(F)-00	8.00	6.85
TC-00107(G)-00	12.50	11.35
TC-00107(H)-00	13.50	12.35
TC-00107(L)-00	6.00	4.85

5	CONTACT	P B S	1	Ag PLATED					
3	TERMINAL	BRASS	2	Ag PLATED	4	COVER BOARD	POLYESTER FILM	1	
1	FRAME	NYLON	1		2	KNOB	NYLON	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: TACT SWITCH

RATING: DC 12V 50mA

CONTACT RESISTANCE: 100mΩ Max.

INSULATION RESISTANCE: 100MΩ at 500V DC

WITHSTAND VOLTAGE: AC 250V for 1 minute.

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 100k Cycles Min.

MODEL NO: TC-00107-00

TOLERANCE

UP TO 1.0:±0.1

1.0 TO 10.0:±0.2

OVER 10.0:±0.3

UNIT: MM

SCALE: 6:1

VERSION: 04

DRWG NO:

DWN.

CHK'D.

APPD.

BY:

DATE: 28-JUN-2007

VIMEX
INTERNATIONAL CORPORATION

