




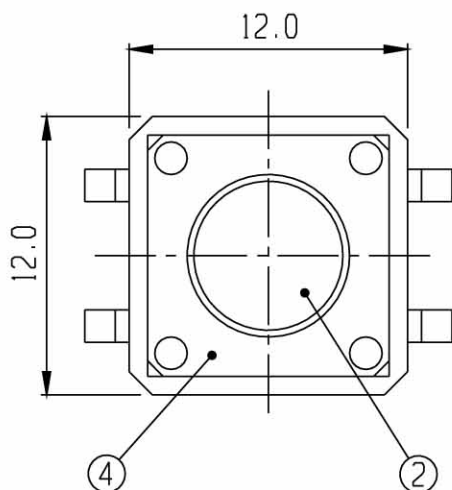



RoHS
Compliance



SCHEMATIC



PCB LAYOUT

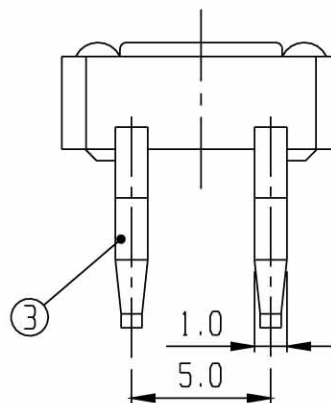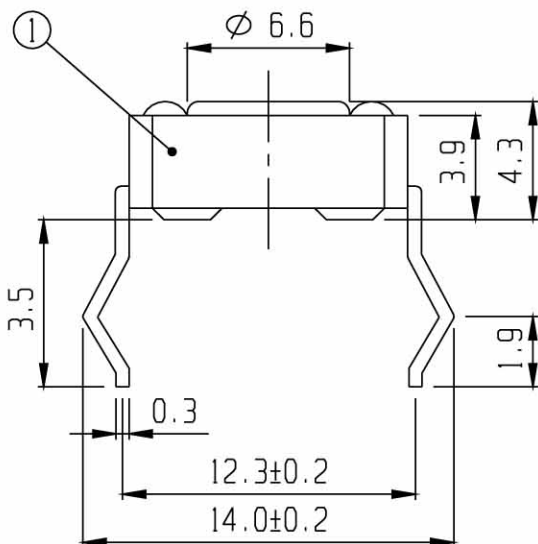

5	CONTACT	P B S	1	Ag PLATED					
3	TERMINAL	BRASS	4	Ag PLATED	4	COVER BOARD	POLYESTER FILM	1	
1	FRAME	NYLON	1		2	KNOB	NYLON	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: TACT SWITCH

RATING: DC 12V 50mA

CONTACT RESISTANCE: 100mΩ Max.

INSULATION RESISTANCE: 100MΩ at 500V DC

WITHSTAND VOLTAGE: AC 250V for 1 minute.

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 100k Cycles Min.

MODEL NO: TC-00121-00

TOLERANCE

UP TO 1.0:±0.1

1.0 TO 10.0:±0.2

OVER 10.0:±0.3

UNIT: MM

SCALE: 4:1

VERSION: 01

DRWG NO:

DWN.

CHK'D.

APPD.

BY:

DATE: 03-DEC-2007

VIMEX
INTERNATIONAL CORPORATION

