

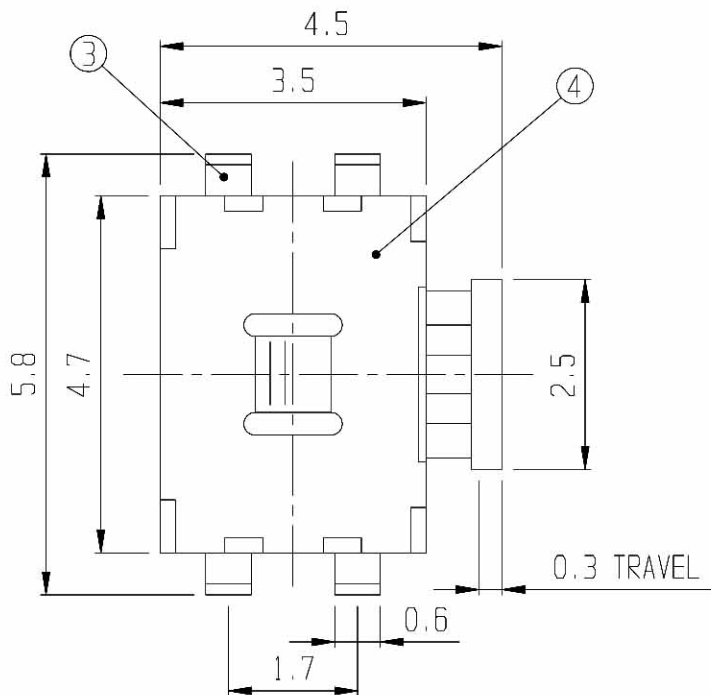
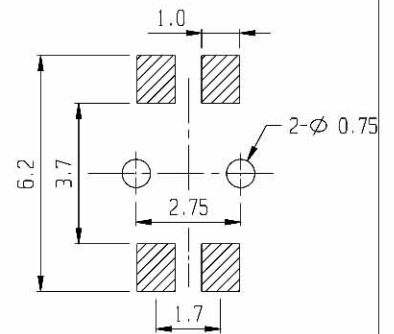


SCHEMATIC

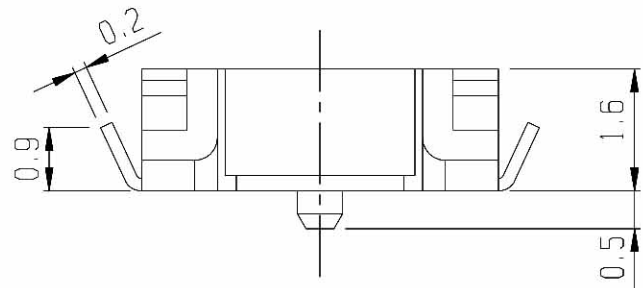

PCB LAYOUT

**RoHS
Compliance**

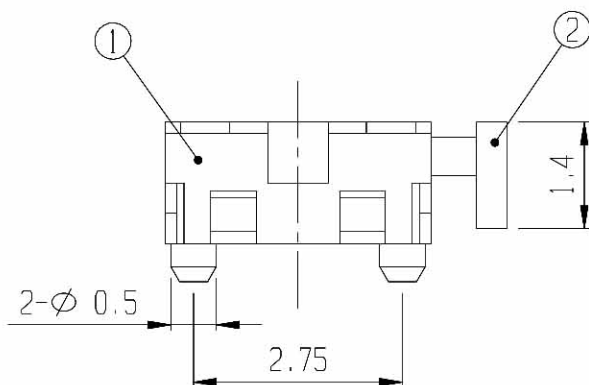

5	CONTACT	S U S	1		6	DUST COVER	POLYIMIDE	1	
3	TERMINAL	BRASS	4	Ag PLATED	4	COVER BOARD	S U S	1	
1	FRAME	NYLON 46	1		2	KNOB	NYLON 46	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: TACT SWITCH

RATING: DC 12V 50mA

CONTACT RESISTANCE: 100mΩ Max.

INSULATION RESISTANCE: 100MΩ at 500V DC

WITHSTAND VOLTAGE: AC 250V for 1 minute.

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 50k cycles Min.

MODEL NO: TC-26402-T01

TOLERANCE UNIT: MM

UP TO 1.0:±0.1 SCALE: 10:1

1.0 TO 10.0:±0.2 VERSION: 02

OVER 10.0:±0.3 DRWG NO:

DWN. *hno*

CHK'D. *pu*

APPD. *[Signature]*

BY: *[Signature]*

DATE: 14-JUL-2004

VIMEX
INTERNATIONAL CORPORATION

